


PLAN VIEW: 38 TL ALUMINUM ACCESS RAMP SYSTEM

NOTE: TO USE 38 TL, MAX RUN OF ENTIRE RAMP SYSTEM CANNOT EXCEED 30'-0"

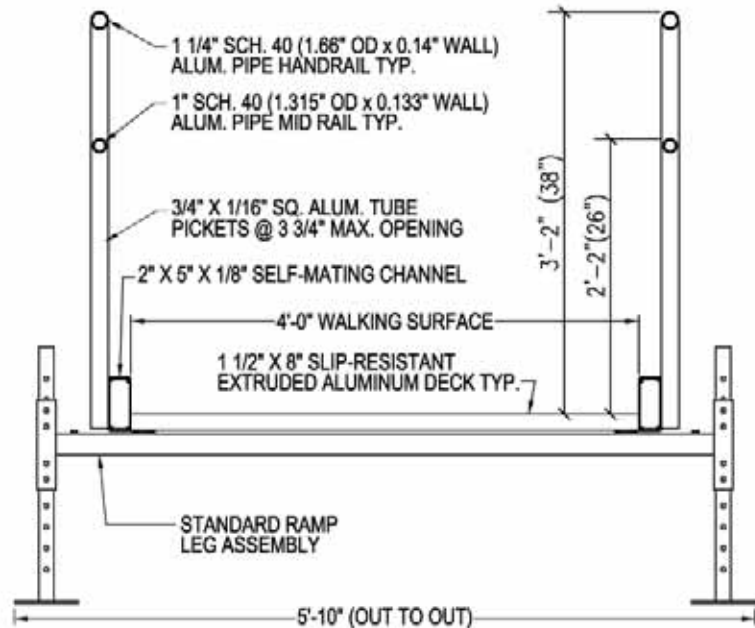

A-A
1
DETAIL
38 TL RAMP CROSS SECTION
SCALE: 3/4" = 1'-0"

GENERAL NOTES:

1. ALUMINUM RAMP, LANDING AND STAIR SECTIONS SHALL BE A RIGID, FREE-SPAN DESIGN.
2. DESIGN OF THE ALUMINUM STRUCTURES SHALL CONFORM TO THE CURRENT EDITION OF THE ALUMINUM ASSOCIATION SPECIFICATIONS AND GUIDELINES FOR ALUMINUM STRUCTURES.
3. ALL ALUMINUM CONSTRUCTION USING 6000 SERIES ALUMINUM ALLOYS. STRUCTURAL MEMBERS TO BE 6061-T6 AND 6063-T6 ALUMINUM ALLOY.
4. ALUMINUM WILL BE STANDARD MILL FINISH UNLESS OTHERWISE NOTED.
5. WELDING SHALL BE IN ACCORDANCE WITH ANSI/AWS D1.2-97 GAS METAL ARC WELDING (GMAW) PROCESS BY EXPERIENCED OPERATORS.
6. ALL FASTENERS TO BE 18-8 (SERIES 304) STAINLESS STEEL UNLESS OTHERWISE NOTED.
7. LANDING, RAMP AND STAIR SECTIONS ARE TO BE ENGINEERED FOR A 100 PSF LIVE LOAD.
8. LANDING AND RAMP WALKING SURFACES SHALL BE DESIGNED FOR A MINIMUM CONCENTRATED VERTICAL LOAD OF 300 LBS APPLIED EVENLY OVER A 12" x 12" AREA. STAIR TREAD SHALL BE DESIGNED FOR A MINIMUM CONCENTRATED VERTICAL LOAD OF 300 LBS APPLIED EVENLY OVER A 4 INCH SQUARE AREA.
9. RAMP AND LANDING GUARDRAILS TO BE 42 INCH MINIMUM HEIGHT UNLESS OTHERWISE SPECIFIED. (34 AND 38 INCH TWO-LINE RAMP RAILS AND 34 AND 38 INCH VERTICAL PICKET RAMP RAILS AS WELL AS CUSTOM DESIGN RAMP RAILS AVAILABLE UPON REQUEST FOR SYSTEMS NO MORE THAN 30 INCHES ABOVE FINISHED GROUND LEVEL.)
10. GUARDRAILS SHALL BE DESIGNED AND CONSTRUCTED FOR A LOAD OF 50 PLF APPLIED HORIZONTALLY AT THE REQUIRED GUARDRAIL HEIGHT AND A SIMULTANEOUS LOAD OF 100 PLF APPLIED VERTICALLY DOWNWARD AT THE TOP OF THE GUARDRAIL.
11. HANDRAILS SHALL BE DESIGNED AND CONSTRUCTED FOR A LOAD OF 50 PLF APPLIED IN ANY DIRECTION.
12. HANDRAILS AND GUARDRAILS SHALL BE DESIGNED FOR A CONCENTRATED LOAD OF 200 LB APPLIED AT ANY POINT AND IN ANY DIRECTION.
13. GUARDRAILS SHALL BE DESIGNED SO THAT A 4 (FOUR) INCH SPHERE CANNOT PASS THROUGH ANY OPENING IN THE RAIL.
14. DECK SURFACE SHALL BE A SLIP RESISTANT, EXTRUDED ALUMINUM DECKING WITH A TRIPLE I-BEAM, SELF-MATING DESIGN.
15. ALL SURFACES, MEMBERS AND THEIR WELDED JOINTS SHALL BE SMOOTH AND FREE FROM SHARP OR JAGGED EDGES.
16. ALL DESIGNS SHOWN HEREIN ARE SUBJECT TO CHANGE PENDING FIELD VERIFICATION OF EXISTING CONDITIONS.

CRITICAL LIFE FUNCTIONS ONLY
 U.S. MADE IF POSSIBLE
 ALL DIMENSIONS UNLESS OTHERWISE NOTED
 ALL DIMENSIONS UNLESS OTHERWISE NOTED
 ALL DIMENSIONS UNLESS OTHERWISE NOTED


REDD Team Manufacturing,
 A Division of Alcoa Extrusions, Inc.
 6599 S.R. 21
 Keyport Heights, Florida 32856
 Phone: 1(800)948-3868 Fax: 1(800)473-0215



FOR QUOTE
 PURPOSES ONLY


UNIVERSAL RAMP SYSTEM
 ALUMINUM ACCESS RAMP SYSTEM
 WITH 30MP VERTICAL PICKET GUARD RAILS

2004
 SALES URS
 SALES URS
 PLM
 SHEET NUMBER
 88VP-INT-1

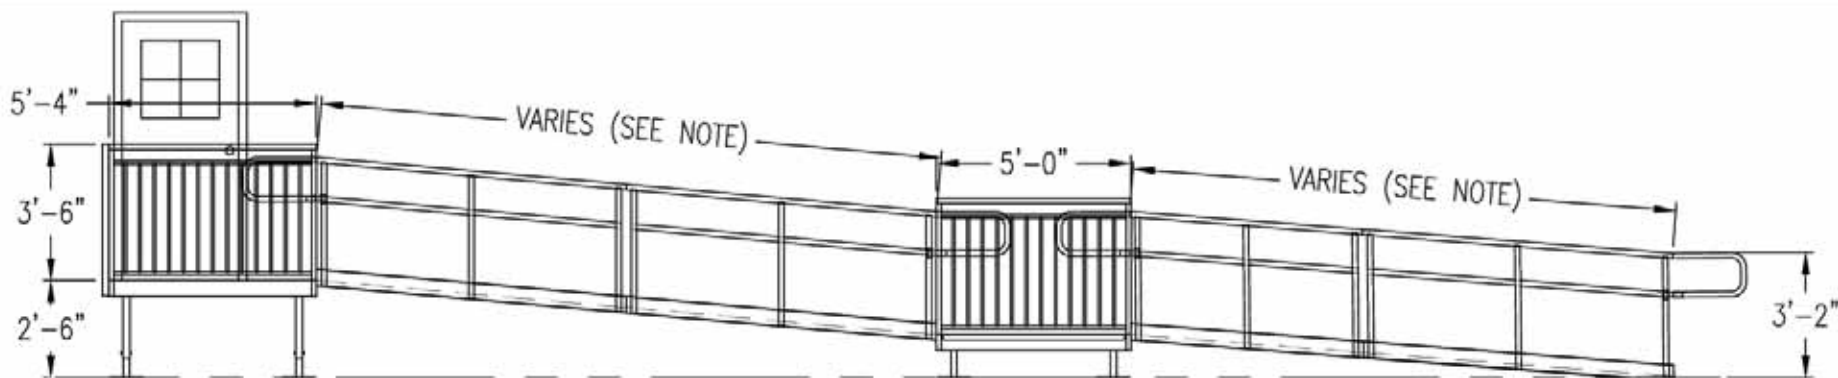


ELEV VIEW: 38 TL ALUMINUM ACCESS RAMP SYSTEM


NOTE: TO USE 38 TL, MAX RUN OF RAMP SYSTEM=30'-0"

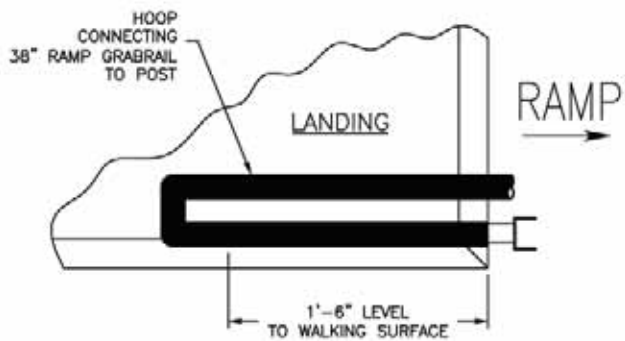

1 UPPER/LOWER HOOP DETAIL
2 38TL RAMP HANDRAIL

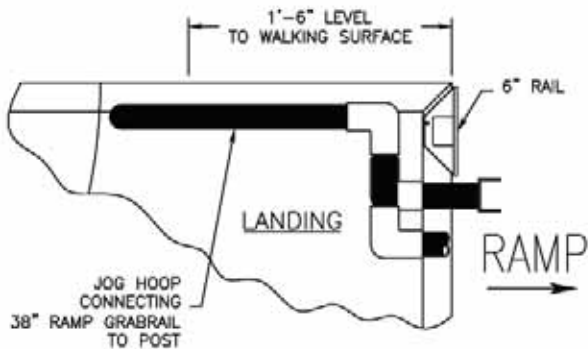

2 UPPER JOG HOOP DETAIL
2 38TL RAMP HANDRAIL

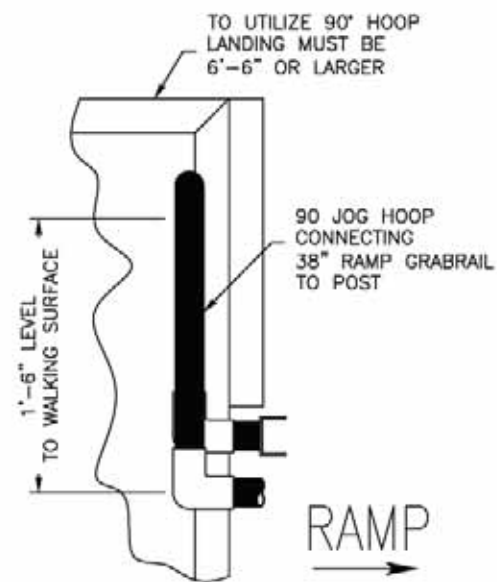

3 UPPER 90° HOOP DETAIL
2 38TL RAMP HANDRAIL (OPTIONAL)

CRITICAL PATH SYSTEMS, INC. (CPS) IS A DIVISION OF REDD TEAM MANUFACTURING, INC. (RTM) WHICH IS A DIVISION OF ALCOE EXTRUSIONS, INC. (AEI). AEI IS A DIVISION OF ALUMINUM EXTRUSIONS, INC. (AEI). AEI IS A DIVISION OF ALUMINUM EXTRUSIONS, INC. (AEI).



REDD Team Manufacturing, Inc.
A Division of Alcoe Extrusions, Inc.
6699 S.R. 21
Keyport Heights, Florida 32856
Phone: (407)948-3888 Fax: (407)948-0218



FOR QUOTE PURPOSES ONLY

UNIVERSAL RAMP SYSTEM
ALUMINUM ACCESS RAMP SYSTEM
WITH JOG VERTICAL POCKET CURVED RAILS

2004
SALES URS
SALES URS
FILM
SHEET NUMBER
88VP-INT-2

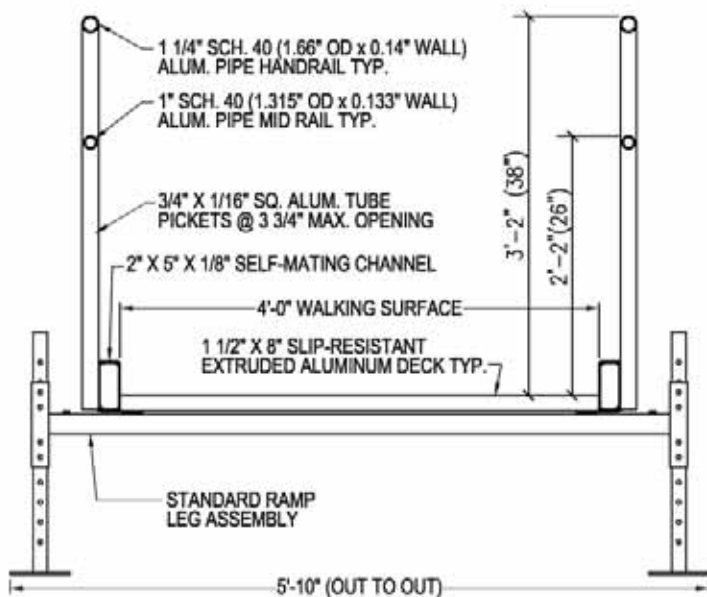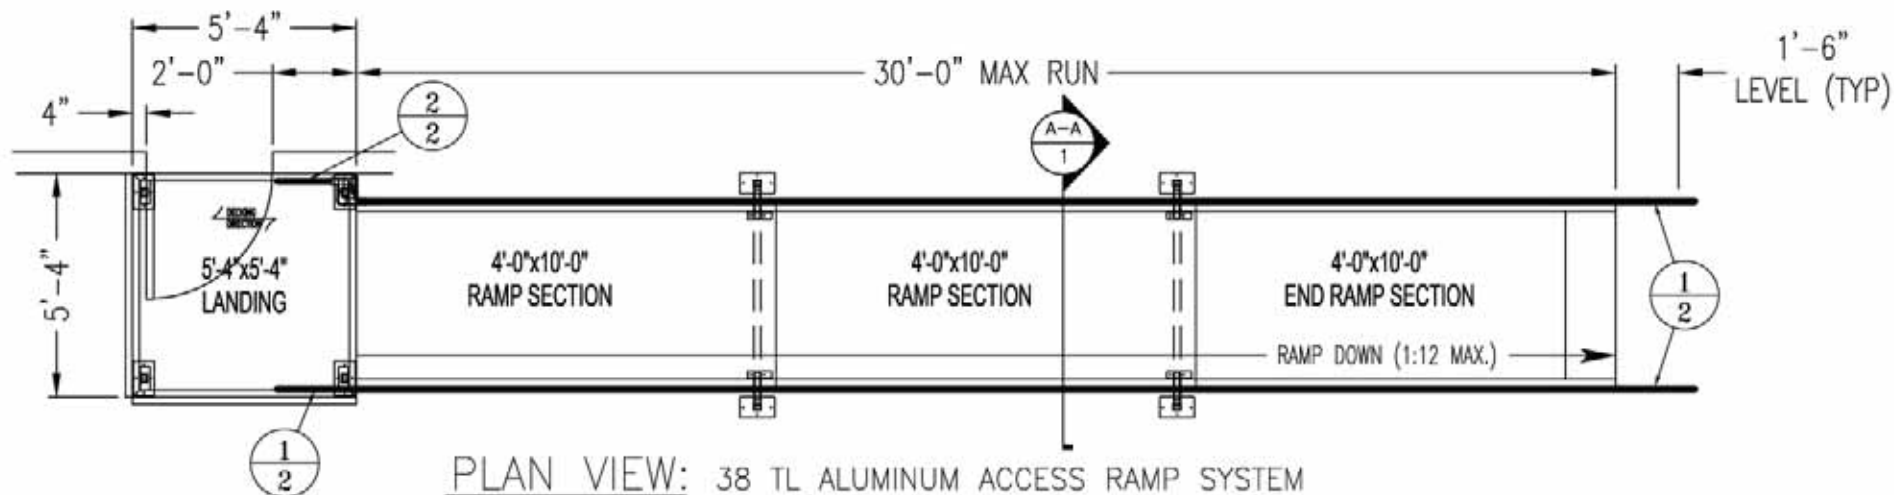

A-A
1 **DETAIL**
38" TL RAMP CROSS SECTION
SCALE: 3/4" = 1'-0"

GENERAL NOTES:

1. ALUMINUM RAMP, LANDING AND STAIR SECTIONS SHALL BE A RIGID, FREE-SPAN DESIGN.
2. DESIGN OF THE ALUMINUM STRUCTURES SHALL CONFORM TO THE CURRENT EDITION OF **THE ALUMINUM ASSOCIATION SPECIFICATIONS AND GUIDELINES FOR ALUMINUM STRUCTURES**.
3. ALL ALUMINUM CONSTRUCTION USING 6000 SERIES ALUMINUM ALLOYS. STRUCTURAL MEMBERS TO BE 6061-T6 AND 6063-T6 ALUMINUM ALLOY.
4. ALUMINUM WILL BE STANDARD MILL FINISH UNLESS OTHERWISE NOTED.
5. WELDING SHALL BE IN ACCORDANCE WITH ANSI/AWS D1.2-97 GAS METAL ARC WELDING (GMAW) PROCESS BY EXPERIENCED OPERATORS.
6. ALL FASTENERS TO BE 18-8 (SERIES 304) STAINLESS STEEL UNLESS OTHERWISE NOTED.
7. LANDING, RAMP AND STAIR SECTIONS ARE TO BE ENGINEERED FOR A 100 PSF LIVE LOAD.
8. LANDING AND RAMP WALKING SURFACES SHALL BE DESIGNED FOR A MINIMUM CONCENTRATED VERTICAL LOAD OF 300 LBS APPLIED EVENLY OVER A 12" x 12" AREA. STAIR TREAD SHALL BE DESIGNED FOR A MINIMUM CONCENTRATED VERTICAL LOAD OF 300 LBS APPLIED EVENLY OVER A 4 INCH SQUARE AREA.
9. RAMP AND LANDING GUARDRAILS TO BE 42 INCH MINIMUM HEIGHT UNLESS OTHERWISE SPECIFIED. (34 AND 38 INCH TWO-LINE RAMP RAILS AND 34 AND 38 INCH VERTICAL PICKET RAMP RAILS AS WELL AS CUSTOM DESIGN RAMP RAILS AVAILABLE UPON REQUEST FOR SYSTEMS NO MORE THAN 30 INCHES ABOVE FINISHED GROUND LEVEL.)
10. GUARDRAILS SHALL BE DESIGNED AND CONSTRUCTED FOR A LOAD OF 50 PLF APPLIED HORIZONTALLY AT THE REQUIRED GUARDRAIL HEIGHT AND A SIMULTANEOUS LOAD OF 100 PLF APPLIED VERTICALLY DOWNWARD AT THE TOP OF THE GUARDRAIL.
11. HANDRAILS SHALL BE DESIGNED AND CONSTRUCTED FOR A LOAD OF 50 PLF APPLIED IN ANY DIRECTION.
12. HANDRAILS AND GUARDRAILS SHALL BE DESIGNED FOR A CONCENTRATED LOAD OF 200 LB APPLIED AT ANY POINT AND IN ANY DIRECTION.
13. GUARDRAILS SHALL BE DESIGNED SO THAT A 4 (FOUR) INCH SPHERE CANNOT PASS THROUGH ANY OPENING IN THE RAIL.
14. DECK SURFACE SHALL BE A SLIP RESISTANT, EXTRUDED ALUMINUM DECKING WITH A TRIPLE I-BEAM, SELF-MATING DESIGN.
15. ALL SURFACES, MEMBERS AND THEIR WELDED JOINTS SHALL BE SMOOTH AND FREE FROM SHARP OR JAGGED EDGES.
16. ALL DESIGNS SHOWN HEREIN ARE SUBJECT TO CHANGE PENDING FIELD VERIFICATION OF EXISTING CONDITIONS.

DESIGN AND CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE CURRENT EDITION OF THE ALUMINUM ASSOCIATION SPECIFICATIONS AND GUIDELINES FOR ALUMINUM STRUCTURES.


REDD Team Manufacturing, Inc.
 A Division of Alcoa Extrusions, Inc.
 6599 S.R. 21
 Keyport Heights, Florida 32856
 Phone: (1-800)948-3868 Fax: (1-800)948-0215




FOR QUOTE PURPOSES ONLY

UNIVERSAL RAMP SYSTEM
 ALUMINUM ACCESS RAMP SYSTEM
 WITH 30MP VERTICAL PICKET GUARD RAILS


2004
 SALES URS
 SALES URS
 PLM
 SHEET NUMBER
 38-ST-1

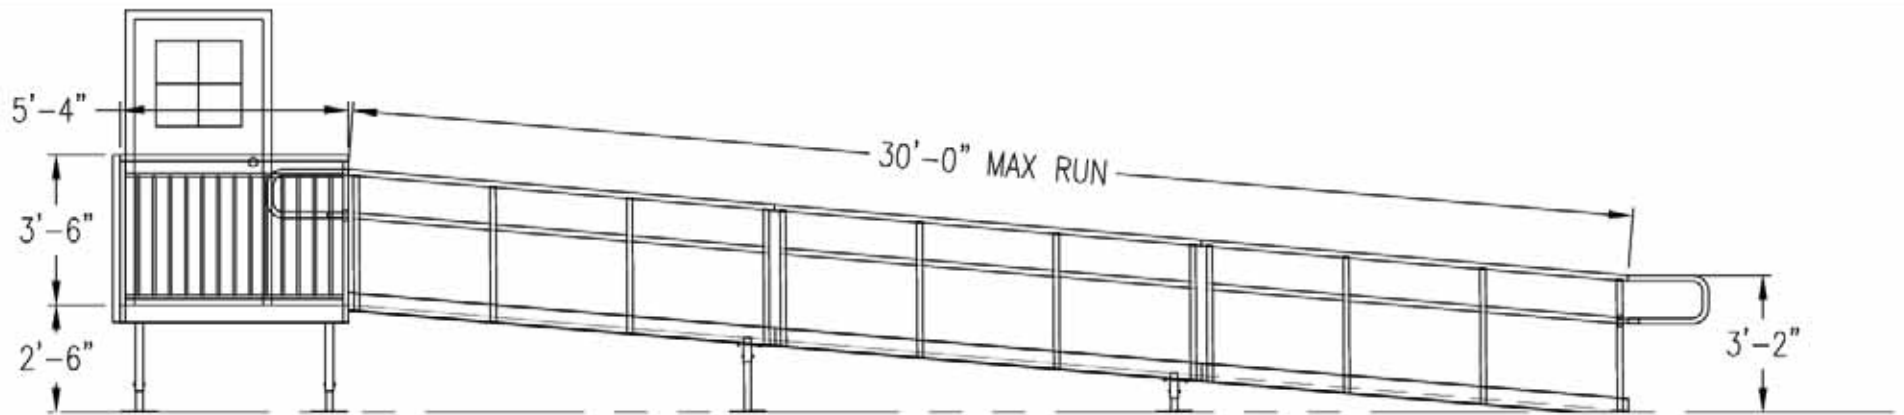


ELEVATION VIEW: 38 TL ALUMINUM ACCESS RAMP SYSTEM

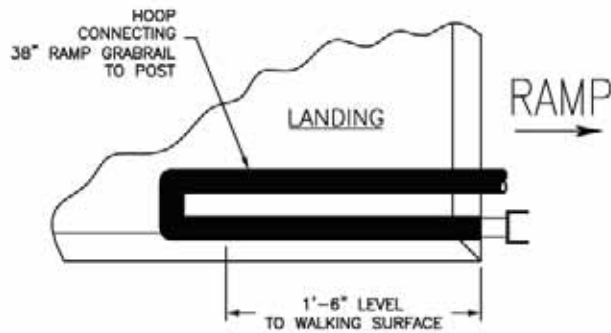

1 UPPER/LOWER HOOP DETAIL
2 38TL RAMP HANDRAIL

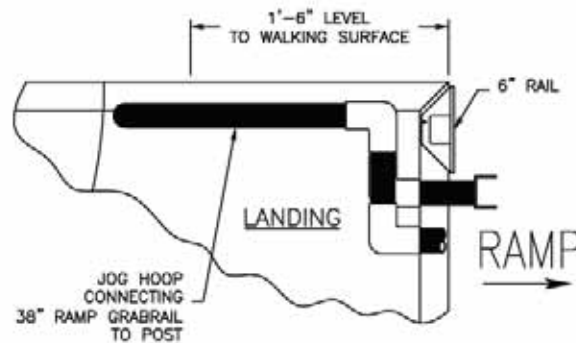

2 UPPER JOG HOOP DETAIL
2 38TL RAMP HANDRAIL

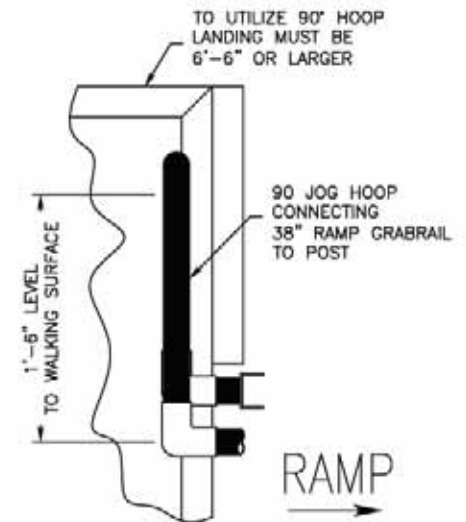

3 UPPER 90° HOOP DETAIL
2 38TL RAMP HANDRAIL (OPTIONAL)

CRITICAL LIFT SPECIFICATIONS WITH THIS
W.P.L. RAMP IS PROVIDED TO
INDICATE THE RAMP SYSTEM IS
DESIGNED TO MEET THE
W.P.L. REQUIREMENTS. CONTACT
REDD TEAM FOR SPECIFICATIONS.


REDD Team Manufacturing,
A Division of Altec Extrusions, Inc.
6699 S.R. 21
Keyport Heights, Florida 32856
Phone: (305)948-3868 Fax: (305)943-0218



FOR QUOTE
PURPOSES ONLY


UNIVERSAL RAMP SYSTEM
ALUMINUM ACCESS RAMP SYSTEM
WITH 38P VERTICAL POCKET CURVED RAIS

2004
SALES URS
SALES URS
PLM
SHEET NUMBER
38VP-ST-2

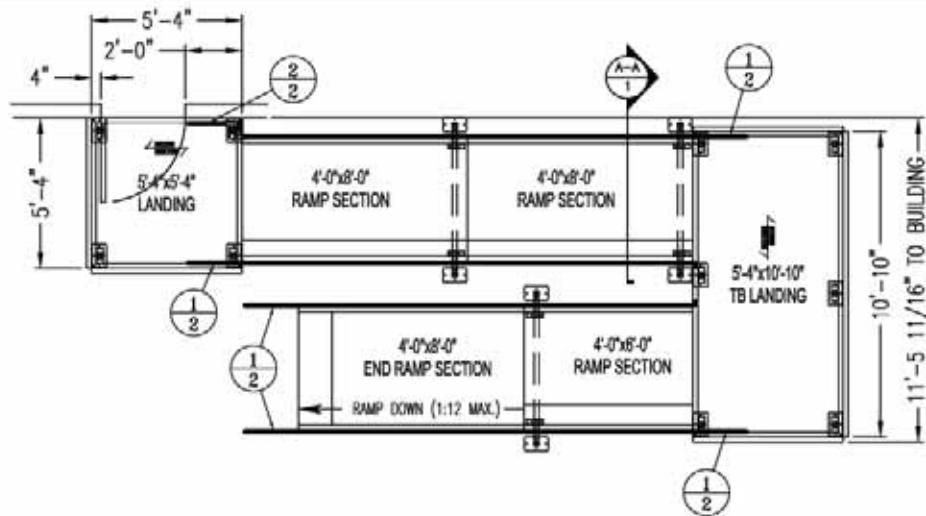

PLAN VIEW: 38 TL ALUMINUM ACCESS RAMP SYSTEM

NOTE: TO USE 38 TL, MAX RUN OF ENTIRE RAMP SYSTEM CANNOT EXCEED 30'-0"

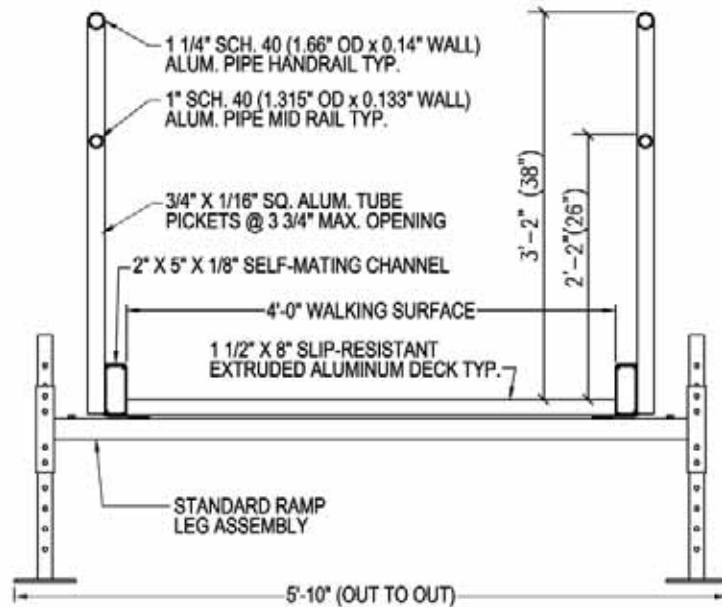

A-A
1 DETAIL
38" TL RAMP CROSS SECTION
SCALE: 3/4" = 1'-0"

GENERAL NOTES:

- ALUMINUM RAMP, LANDING AND STAIR SECTIONS SHALL BE A RIGID, FREE-SPAN DESIGN.
- DESIGN OF THE ALUMINUM STRUCTURES SHALL CONFORM TO THE CURRENT EDITION OF **THE ALUMINUM ASSOCIATION SPECIFICATIONS AND GUIDELINES FOR ALUMINUM STRUCTURES**.
- ALL ALUMINUM CONSTRUCTION USING 6000 SERIES ALUMINUM ALLOYS. STRUCTURAL MEMBERS TO BE 6061-T6 AND 6063-T6 ALUMINUM ALLOY.
- ALUMINUM WILL BE STANDARD MILL FINISH UNLESS OTHERWISE NOTED.
- WELDING SHALL BE IN ACCORDANCE WITH ANSI/AWS D1.2-97 GAS METAL ARC WELDING (GMAW) PROCESS BY EXPERIENCED OPERATORS.
- ALL FASTENERS TO BE 18-8 (SERIES 304) STAINLESS STEEL UNLESS OTHERWISE NOTED.
- LANDING, RAMP AND STAIR SECTIONS ARE TO BE ENGINEERED FOR A 100 PSF LIVE LOAD.
- LANDING AND RAMP WALKING SURFACES SHALL BE DESIGNED FOR A MINIMUM CONCENTRATED VERTICAL LOAD OF 300 LBS APPLIED EVENLY OVER A 12" x 12" AREA. STAIR TREAD SHALL BE DESIGNED FOR A MINIMUM CONCENTRATED VERTICAL LOAD OF 300 LBS APPLIED EVENLY OVER A 4 INCH SQUARE AREA.
- RAMP AND LANDING GUARDRAILS TO BE 42 INCH MINIMUM HEIGHT UNLESS OTHERWISE SPECIFIED. (34 AND 38 INCH TWO-LINE RAMP RAILS AND 34 AND 38 INCH VERTICAL PICKET RAMP RAILS AS WELL AS CUSTOM DESIGN RAMP RAILS AVAILABLE UPON REQUEST FOR SYSTEMS NO MORE THAN 30 INCHES ABOVE FINISHED GROUND LEVEL.)
- GUARDRAILS SHALL BE DESIGNED AND CONSTRUCTED FOR A LOAD OF 50 PLF APPLIED HORIZONTALLY AT THE REQUIRED GUARDRAIL HEIGHT AND A SIMULTANEOUS LOAD OF 100 PLF APPLIED VERTICALLY DOWNWARD AT THE TOP OF THE GUARDRAIL.
- HANDRAILS SHALL BE DESIGNED AND CONSTRUCTED FOR A LOAD OF 50 PLF APPLIED IN ANY DIRECTION.
- HANDRAILS AND GUARDRAILS SHALL BE DESIGNED FOR A CONCENTRATED LOAD OF 200 LB APPLIED AT ANY POINT AND IN ANY DIRECTION.
- GUARDRAILS SHALL BE DESIGNED SO THAT A 4 (FOUR) INCH SPHERE CANNOT PASS THROUGH ANY OPENING IN THE RAIL.
- DECK SURFACE SHALL BE A SLIP RESISTANT, EXTRUDED ALUMINUM DECKING WITH A TRIPLE I-BEAM, SELF-MATING DESIGN.
- ALL SURFACES, MEMBERS AND THEIR WELDED JOINTS SHALL BE SMOOTH AND FREE FROM SHARP OR JAGGED EDGES.
- ALL DESIGNS SHOWN HEREIN ARE SUBJECT TO CHANGE PENDING FIELD VERIFICATION OF EXISTING CONDITIONS.

CRITICAL LIFE FUNCTIONS ONLY (CLF) IS A DIVISION OF REDD TEAM MANUFACTURING, INC. 6599 S.R. 21 KEYSTONE HEIGHTS, FLORIDA 32856
PHONE: 1(800)948-3868 FAX: 1(321)473-0215


REDD Team Manufacturing, Inc.
A Division of Alcece Extrusions, Inc.
6599 S.R. 21
Keystone Heights, Florida 32856
Phone: 1(800)948-3868 Fax: 1(321)473-0215

REDD Team Manufacturing, Inc.


FOR QUOTE PURPOSES ONLY

UNIVERSAL RAMP SYSTEM
ALUMINUM ACCESS RAMP SYSTEM
WITH 38" VERTICAL PICKET GUARD RAILS


2004
SALES URS
SALES URS
PLM
SHEET NUMBER
38VP-TB-

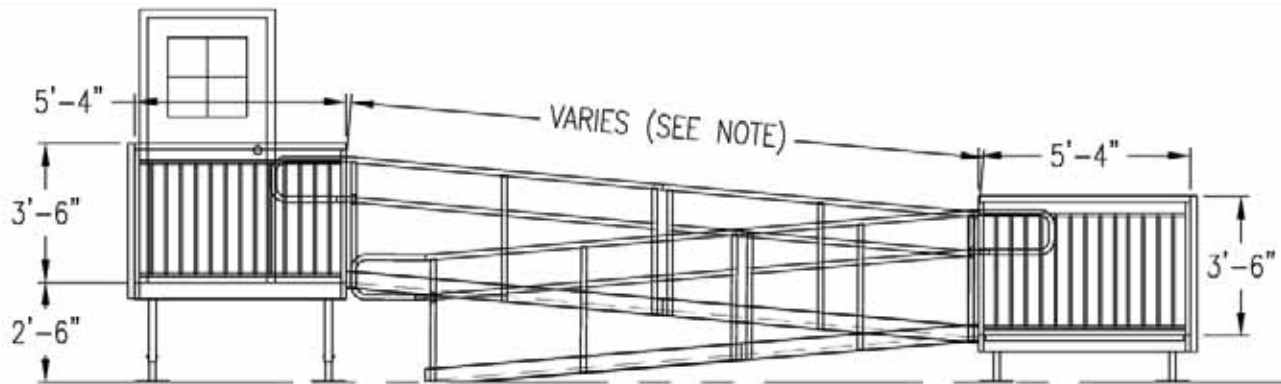


ELEV VIEW: 38 TL ALUMINUM ACCESS RAMP SYSTEM
 NOTE: TO USE 38 TL, MAX RUN OF RAMP SYSTEM=30'-0"

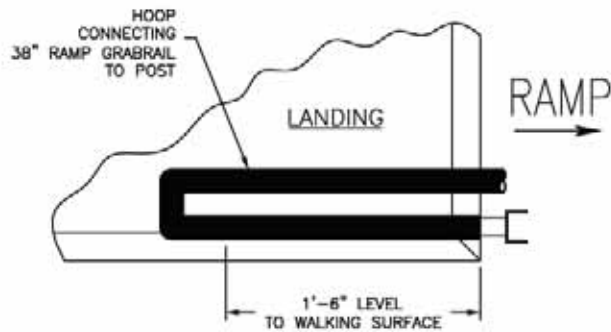

1 UPPER/LOWER HOOP DETAIL
 2 38TL RAMP HANDRAIL

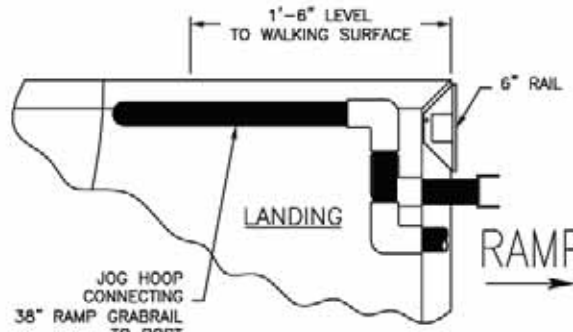

2 UPPER JOG HOOP DETAIL
 2 38TL RAMP HANDRAIL

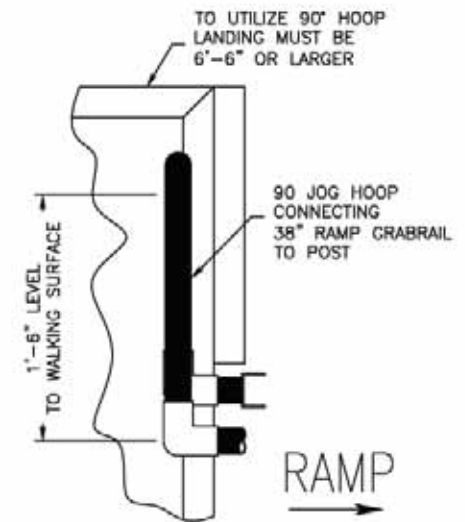

3 UPPER 90° HOOP DETAIL
 2 38TL RAMP HANDRAIL (OPTIONAL)

CRITICAL LIFT SAFETY: THIS RAMP IS NOT TO BE USED AS A STAIR. ALWAYS USE THE HANDRAILS AND FOOTRESTS. THE RAMP IS NOT TO BE USED AS A STAIR. ALWAYS USE THE HANDRAILS AND FOOTRESTS. THE RAMP IS NOT TO BE USED AS A STAIR. ALWAYS USE THE HANDRAILS AND FOOTRESTS.


REDD Team Manufacturing, Inc.
 A Division of Altec Extrusions, Inc.
 6599 S.R. 21
 Keyport Heights, Florida 32856
 Phone: (305)948-3888 Fax: (305)943-0218



FOR QUOTE PURPOSES ONLY


UNIVERSAL RAMP SYSTEM
 ALUMINUM ACCESS RAMP SYSTEM
 WITH 38P VERTICAL POCKET CURVED HANDRAILS

DATE: 2004
 SALES URS
 SALES URS
 FILE: PLM
 SHEET NUMBER
 38VP-TD-2

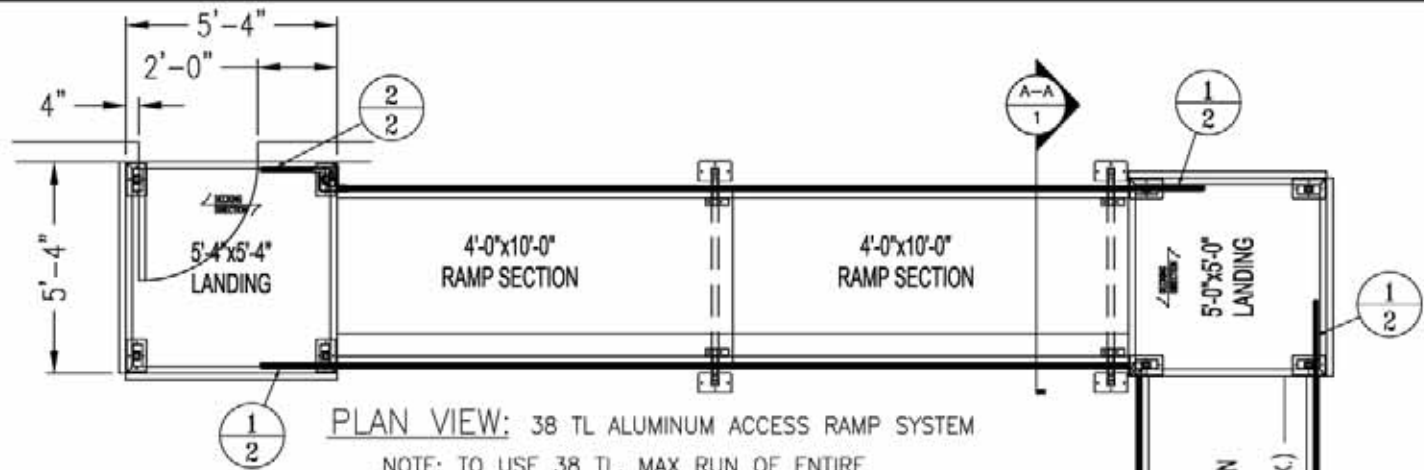

PLAN VIEW: 38 TL ALUMINUM ACCESS RAMP SYSTEM


NOTE: TO USE 38 TL, MAX RUN OF ENTIRE RAMP SYSTEM CANNOT EXCEED 30'-0"

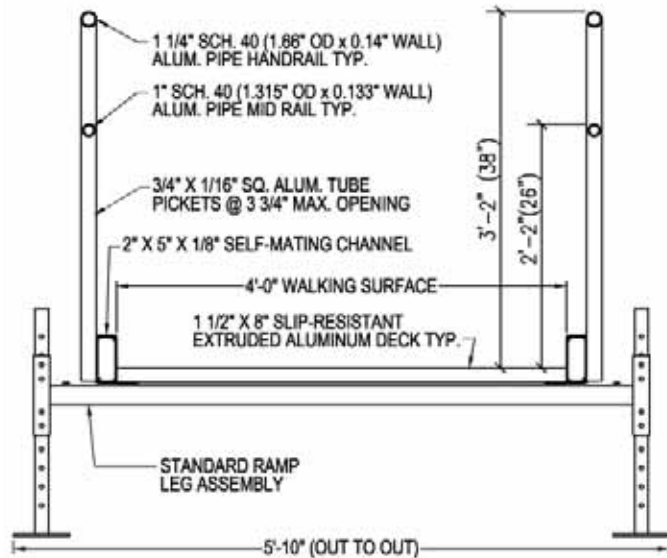

A-A
1
DETAIL
38" TL RAMP CROSS SECTION
SCALE: 3/4"=1'-0"

GENERAL NOTES:

1. ALUMINUM RAMP, LANDING AND STAIR SECTIONS SHALL BE A RIGID, FREE-SPAN DESIGN.
2. DESIGN OF THE ALUMINUM STRUCTURES SHALL CONFORM TO THE CURRENT EDITION OF THE ALUMINUM ASSOCIATION SPECIFICATIONS AND GUIDELINES FOR ALUMINUM STRUCTURES.
3. ALL ALUMINUM CONSTRUCTION USING 6000 SERIES ALUMINUM ALLOYS. STRUCTURAL MEMBERS TO BE 6061-T6 AND 6063-T6 ALUMINUM ALLOY.
4. ALUMINUM WILL BE STANDARD MILL FINISH UNLESS OTHERWISE NOTED.
5. WELDING SHALL BE IN ACCORDANCE WITH ANSI/AWS D1.2-97 GAS METAL ARC WELDING (GMAW) PROCESS BY EXPERIENCED OPERATORS.
6. ALL FASTENERS TO BE 16-8 (SERIES 304) STAINLESS STEEL UNLESS OTHERWISE NOTED.
7. LANDING, RAMP AND STAIR SECTIONS ARE TO BE ENGINEERED FOR A 100 PSF LIVE LOAD.
8. LANDING AND RAMP WALKING SURFACES SHALL BE DESIGNED FOR A MINIMUM CONCENTRATED VERTICAL LOAD OF 300 LBS APPLIED EVENLY OVER A 12" x 12" AREA. STAIR TREAD SHALL BE DESIGNED FOR A MINIMUM CONCENTRATED VERTICAL LOAD OF 300 LBS APPLIED EVENLY OVER A 4 INCH SQUARE AREA.
9. RAMP AND LANDING GUARDRAILS TO BE 42 INCH MINIMUM HEIGHT UNLESS OTHERWISE SPECIFIED. (34 AND 38 INCH TWO-LINE RAMP RAILS AND 34 AND 38 INCH VERTICAL PICKET RAMP RAILS AS WELL AS CUSTOM DESIGN RAMP RAILS AVAILABLE UPON REQUEST FOR SYSTEMS NO MORE THAN 30 INCHES ABOVE FINISHED GROUND LEVEL.)
10. GUARDRAILS SHALL BE DESIGNED AND CONSTRUCTED FOR A LOAD OF 50 PLF APPLIED HORIZONTALLY AT THE REQUIRED GUARDRAIL HEIGHT AND A SIMULTANEOUS LOAD OF 100 PLF APPLIED VERTICALLY DOWNWARD AT THE TOP OF THE GUARDRAIL.
11. HANDRAILS SHALL BE DESIGNED AND CONSTRUCTED FOR A LOAD OF 50 PLF APPLIED IN ANY DIRECTION.
12. HANDRAILS AND GUARDRAILS SHALL BE DESIGNED FOR A CONCENTRATED LOAD OF 200 LB APPLIED AT ANY POINT AND IN ANY DIRECTION.
13. GUARDRAILS SHALL BE DESIGNED SO THAT A 4 (FOUR) INCH SPHERE CANNOT PASS THROUGH ANY OPENING IN THE RAIL.
14. DECK SURFACE SHALL BE A SLIP RESISTANT, EXTRUDED ALUMINUM DECKING WITH A TRIPLE I-BEAM, SELF-MATING DESIGN.
15. ALL SURFACES, MEMBERS AND THEIR WELDED JOINTS SHALL BE SMOOTH AND FREE FROM SHARP OR JAGGED EDGES.
16. ALL DESIGNS SHOWN HEREIN ARE SUBJECT TO CHANGE PENDING FIELD VERIFICATION OF EXISTING CONDITIONS.

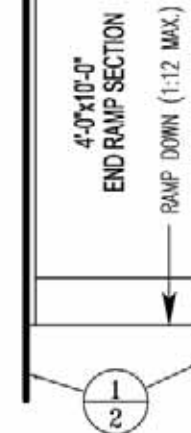

SEE PLAN SECTION FOR
W.L. AND F. FINISHES TO
BE SHOWN ON ALL VIEWS.
W.L. FINISHES TO BE
W.L. FINISHES TO BE
CONFORM TO THE
SPECIFICATIONS.



REDD Team Manufacturing,
A Division of Alcoa Extrusions, Inc.
6599 S.R. 21
KeySTONE Heights, Florida 32856
Phone: 1(800)948-3868 Fax: 1(352)473-0215




FOR QUOTE
PURPOSES ONLY

UNIVERSAL RAMP SYSTEM
ALUMINUM ACCESS RAMP SYSTEM
WITH 38" VERTICAL PICKET GUARD RAILS


2004
SALES URS
SALES URS
PLM
SHEET NUMBER
38VP-90-

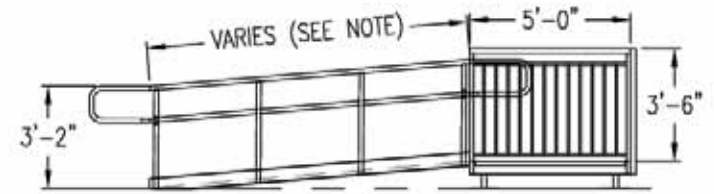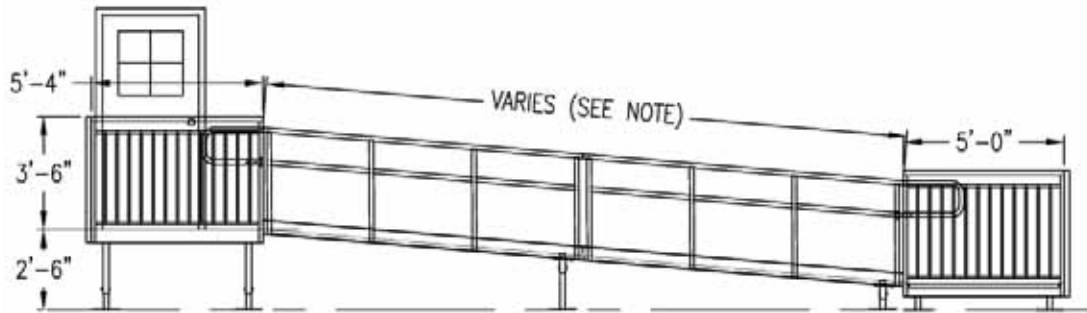


ELEV VIEW: 38 TL ALUMINUM ACCESS RAMP SYSTEM
 NOTE: TO USE 38 TL, MAX RUN OF RAMP SYSTEM=30'-0"

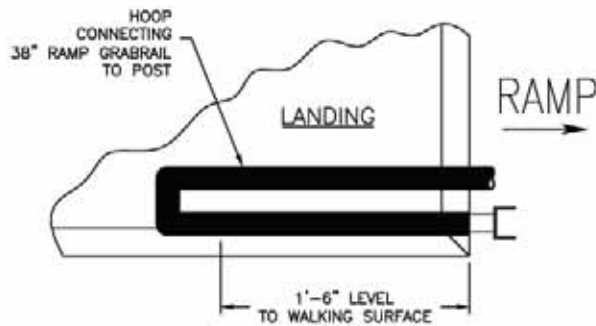

① UPPER/LOWER HOOP DETAIL
 ② 38TL RAMP HANDRAIL

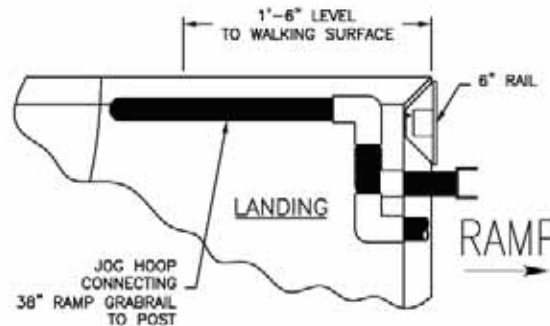

② UPPER JOG HOOP DETAIL
 ② 38TL RAMP HANDRAIL

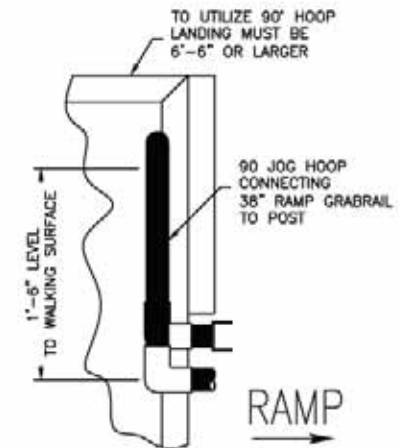

③ UPPER 90° HOOP DETAIL
 ② 38TL RAMP HANDRAIL (OPTIONAL)

CRITICAL LINE SERVICES HAS THE U.S. PATENT FOR PROTECTIVE RAILING SYSTEMS. ALL RIGHTS RESERVED. THE COMPANY HAS THE RIGHT TO MAKE CHANGES WITHOUT NOTICE. THE COMPANY IS NOT RESPONSIBLE FOR THE CONSTRUCTION OF ANY STRUCTURE.

REDD Team Manufacturing, Inc. A Division of Alice Extrusions, Inc. 6599 S.R. 21 Keyport Heights, Florida 32856 Phone: (800)948-3868 Fax: (352)473-0215



FOR QUOTE PURPOSES ONLY

UNIVERSAL RAMP SYSTEM
 ALUMINUM ACCESS RAMP SYSTEM
 WITH JOG VERTICAL POCKET GUARD RAILS

2004
 SALES URS
 SALES URS
 PLM
 SHEET NUMBER
 86VP-90-2